


# SOCKS BOARDING STEAM BOARDING MACHINE FOR SOCKS GHIBLI 96





#### **TECNOPEA**

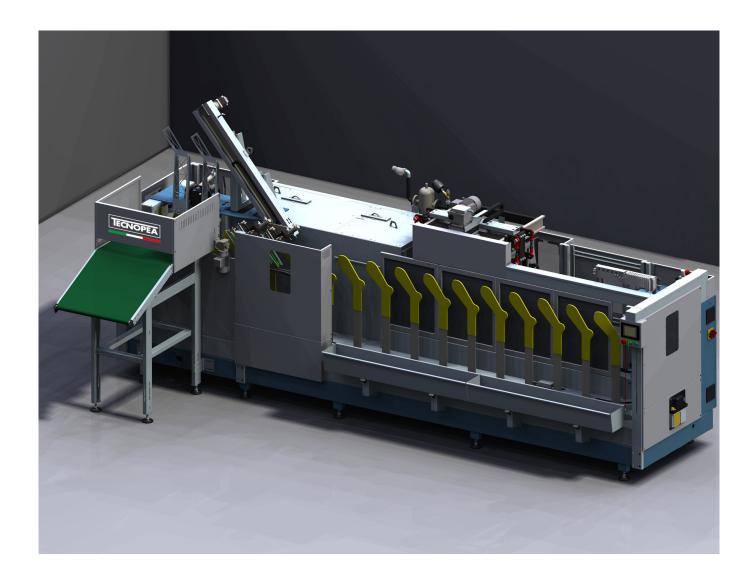

# SOCKS BOARDING GHIBLI 96

Automatic steam boarding machine with 96 forms for socks. Loading of products can be operated by 2 persons. The boarding forms are divided into 4 groups of 24 pieces, on each group forms are placed side by side before entering the steam chamber and subsequently in the drying tunnel. A long dwell time inside the steam chamber allows a very high level of finishing quality. The chamber, fitted on the machine frame, has been reduced to the minimum in terms of weight, volume and steam consumption.

The drying tunnel, containing 2 groups of 24 forms, is heated by very high efficiency steam radiators to reach high temperatures, with a very low steam consumption.

The socks are perfectly dried while maintaining very high productivity with a cycle time of 3 seconds per pair.

A clamps stripping device, driven by a brushless motor, removes socks from the boarding forms and stacks them on a collating belt.

# SOCKS BOARDING GHIBLI 96

Specifications	Values
Dimensions	5.700x3.050X2.700 (h)
Air pressure	6 bar
Air consumption	17 m³ /hr
Installed power	3 kW
Absorbed power	2 kW
Min. steam line pressure	6 bar
Max steam chamber pressure	3 bar
Steam consumption range	40 – 60 kg/hr
Min. cycle time	3 sec./1 pair
Max. productivity	1.200 pair/hr 100 Dz/hr





45° foot shape forms


#### DISCLAIMER:

#### **SOCKS BOARDING**

GHIBLI 96



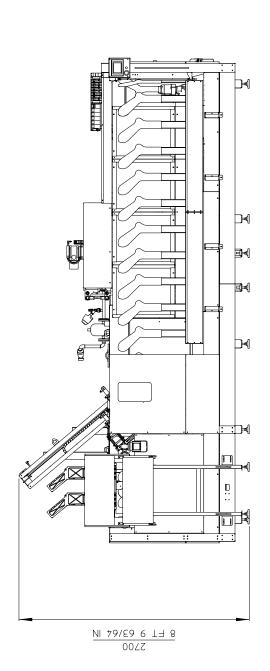

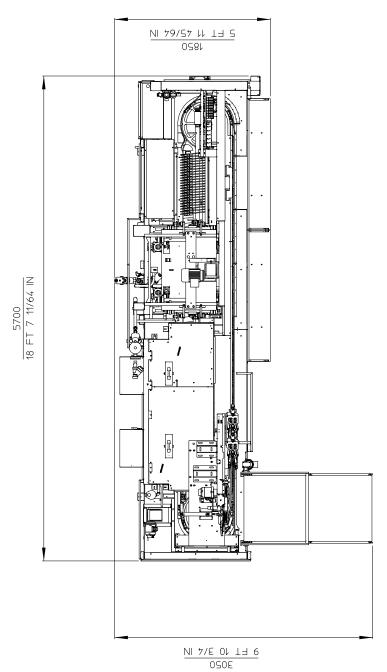

### **TECNOPEA**



